


TECHNICAL DATA

U_{max}	8.0 V	$T_{hot}=25^{\circ}C$ Dry air
Q_{max}	80.4 W	
ΔT_{max}	68°	
I_{max}	16.1 A	
ACR at 25°C	0.45 Ohm	
Hot side	Ceramics Al_2O_3 , white 96%	
Cold side		
Max. processing temperature	Depends on chosen solder type	
Standard tolerances for thermal and electrical parameters $\pm 10\%$		

STANDARD ORDERING OPTIONS

Nº	Option	Parameter
1	Lead wires	AWG Nº
		18 20
2	Lead wires length	L - under customer request
3	Lead wires insulation	Type / Max. processing temp.
		Without insulation / See solder type m.p.t
		PVC / 105° C
		Silicone / 180° C
4	Internal solder	Type / Max. processing temp.
		Type-1 / 138° C
		Type-2 / 227° C
		Type-3 / 232° C
5	Anticorrosional coating	yes no
6	Sealing	Type / Max. processing temp.
		Without sealing / 200° C
		Epoxy / 130° C
		Silicone / 180° C

MODULE DRAWING
standard design

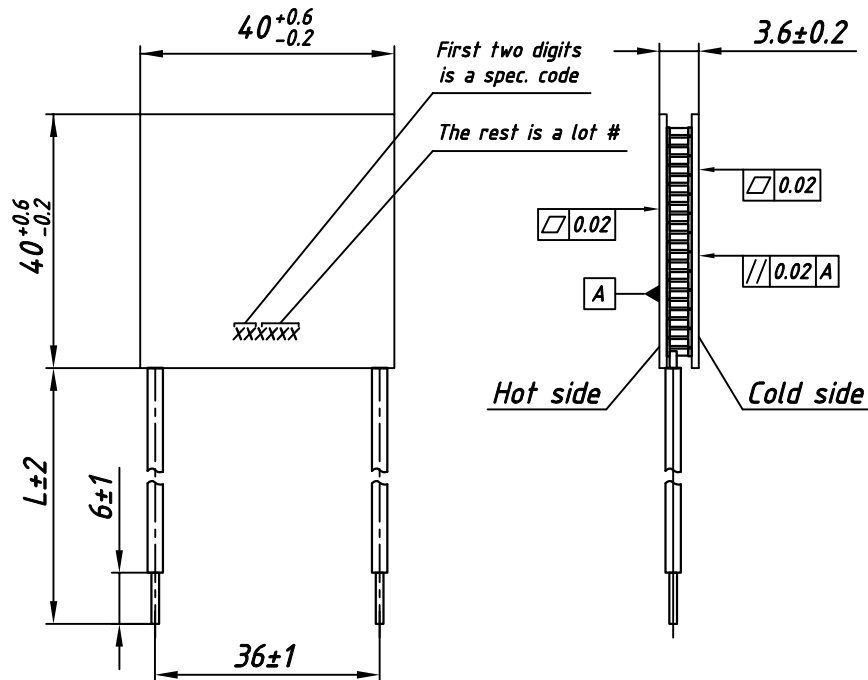

AVAILABLE MODIFICATIONS

Design	Description
TM-71-2.0-15.0 M	High reliable version on cold side

OPTIONS UPON REQUEST

Height tolerance	± 0.02
Unflatness and nonparallelism	± 0.02

- Solder type marked * is not compliant to RoHS (2002/95/EC)
- For another options consult of our technical support engineers